

Ultraleather® | Pro

EPA-registered antimicrobial protection • Ink and denim resistant



554-5648 Cloud



554-0008 White Wash



554-3803 Parfait



554-3352 Shore




554-3087 Woodcres




554-2711 Blueberry



554-8229 Campfire



554-1329 Rhubarb




554-3376 Dark Chocolate



554-4530 Coastal



554-5733 Mortar



554-5626 Char



554-5618 Dark Knight

Brisa® | Original & Distressed


Breathable technology



533-5703 Wrought Iron




533-3946 New Sand




535-3871 Moccasin*



535-3972 Lasso*



533-1383 Pompeian Red




533-2698 Sterling Blue




533-2621 Blue Sea



533-2694 Night Navy




533-1361 Beet Root



533-5747 White



533-5820 Quicksilver



533-5802 Ash




533-5749 Black Onyx


*Brisa® | Distressed

Ultraleather® | Promessa®

EPA-registered antimicrobial protection

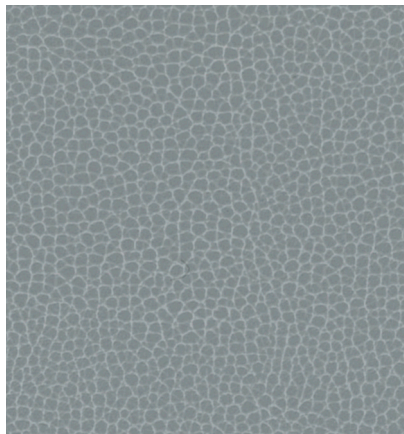


363-2695 Aquamarine




363-5715 Snow




363-3152 Parchment




363-3463 Cocoa



363-3462 Woodpecker



363-1396 Blood Orange



363-1387 Dogwood



363-9371 Beet



363-3037 Horsehair




363-4481 Scallion



363-2680 Atlantic



363-5011 Battleship



363-5845 Ebony

SPECIFICATIONS

	Ultraleather® Pro EPA-registered antimicrobial protection Ink and denim [†] resistant	Brisa® Original Brisa® Distressed Breathable technology	Ultraleather® Promessa® EPA-registered antimicrobial protection	
COMPOSITION: (SURFACE) (BACKING)	100% POLYCARBONATE POLYURETHANE 100% REINFORCED RAYON	100% POLYCARBONATE POLYURETHANE 65% POLYESTER, 35% RAYON	100% POLYCARBONATE POLYURETHANE 65% POLYESTER, 35% RAYON	
WEIGHT:	APPROX. 9.7 OZ. PER SQUARE YARD APPROX. 330 GRAMS PER SQUARE METRE	APPROX. 9.3 OZ. PER SQUARE YARD APPROX. 315 GRAMS PER SQUARE METRE	APPROX. 12 OZ. PER SQUARE YARD APPROX. 410 GRAMS PER SQUARE METRE	
THICKNESS:	APPROX. 1.0 MM	APPROX. 1.0 MM	APPROX. 1.1 MM	
WIDTH:	54 INCHES / 137 CM	54 INCHES / 137 CM	54 INCHES / 137 CM	
CHARACTERISTICS				
ABRASION: (MEETS OR EXCEEDS)	ASTM D4157 / 500,000 DOUBLE RUBS* BS 2543 / 200,000 RUBS** *WYZENBEEK **MARTINDALE	ASTM D4157 / 300,000 DOUBLE RUBS* BS 2543 / 160,000 RUBS** *WYZENBEEK **MARTINDALE	ASTM D4157 / 400,000 DOUBLE RUBS* BS 2543 / 180,000 RUBS** *WYZENBEEK **MARTINDALE	
AIR PERMEABILITY:	NA	ASTM D737	NA	
HYDROLYSIS:	14+ WEEKS ASTM D3690-02 SECT. 6.11 (HYDROLYTIC STABILITY) ISO 1419 METHOD C (ACCELERATED AGEING)	14+ WEEKS ASTM D3690-02 SECT. 6.11 (HYDROLYTIC STABILITY) ISO 1419 METHOD C (ACCELERATED AGEING)	14+ WEEKS ASTM D3690-02 SECT. 6.11 (HYDROLYTIC STABILITY) ISO 1419 METHOD C (ACCELERATED AGEING)	
ADHESION OF COATING:	ASTM D751	ASTM D751	ASTM D751	
TEAR STRENGTH:	ASTM D2261	ASTM D2261	ASTM D2261	
BREAKING STRENGTH:	ASTM D5034	ASTM D5034	ASTM D5034	
SOUND ABSORPTION:	NA	ASTM C423	NA	
ANTIMICROBIAL:	ASTM E2180	NA	ASTM E2180	
COLORFASTNESS				
CROCKING:	AATCC 8, CLASS 5 WET & DRY	AATCC 8, CLASS 5 WET & DRY	AATCC 8, CLASS 5 WET & DRY	
LIGHT:	AATCC 16.3, 200 HOURS, GRADE 4-5	AATCC 16.3, 200 HOURS, GRADE 4-5	AATCC 16.3, 200 HOURS, GRADE 4-5	
F/R RATING (HFR FREE)				
F/R RATING:	ASTM E84 (ADHERED) CA TB 117-2013 FMVSS 302 & 95/28 ANNEX IV NFPA 260 UFAC	CLASS A PASS PASS CLASS 1 CLASS 1	ASTM E84 (ADHERED) CA TB 117-2013 FMVSS 302 & 95/28 ANNEX IV NFPA 260 UFAC	CLASS A PASS PASS CLASS 1 CLASS 1
<p>• CAN BE TREATED TO MEET FAR SPECIFICATIONS.</p> <p>• THESE FABRICS, WHEN TREATED AND/OR USED WITH OTHER COMPATIBLE FURNITURE COMPONENTS, HAVE BEEN SHOWN TO PERFORM UNDER THE FIRE TEST CONDITIONS OF CALIFORNIA TECHNICAL BULLETIN 133, ASTM E 84 (UNADHERED), BS 5852 SOURCE 5 ("CRIB 5"), BS 7175, BS 5867 PART 2 TYPE B, IMO A.652(16) AND NFPA 701.</p>				

[†]REMOVAL OF MOST DENIM DYE MAY VARY DEPENDING ON THE QUALITY OF DYE AND THE PERIOD OF TIME THE STAIN SETS IN. DYE TRANSFER IS DIFFICULT TO CONTROL, NOT ALWAYS PREVENTABLE, AND MAY BE IRREVERSIBLE.

Cleaning & Care Instructions

- Wipe up spills as soon as they occur
- Clean with soap and water or alcohol based cleaners
- Sanitize using (1:5) bleach/water solution or other approved disinfectants
- For ink (Ultraleather® | Pro) and other stubborn stains, wipe off with isopropyl alcohol as soon as possible
- Thoroughly rinse all solution residue with clean water
- Air dry

Earth Friendly

- **GREENGUARD Certified**
 - Meets stringent chemical emission limits for various VOCs (ex. Formaldehyde)
 - Promotes healthier indoor air quality
 - Contributes towards satisfying credits under LEED® and BIFMA
- Compliant with Prop 65
- Less than 100 ppm of EPA-registered antimicrobial treatment¹
 - No Triclocarban or Triclosan
 - No Bisphenol A (BPA)
 - No Conflict Minerals
 - No Flame Retardants (Halogenated, Brominated: ex. PBDEs)
 - No Heavy Metal Stabilizers
 - No PFCs (Perfluorinated Chemicals)²
 - No Plasticizer Phthalates
 - No POPs (Persistent Organic Pollutants)
 - No PVC (Polyvinyl Chloride)
 - No toxic by-products
- Over 99% of solvents recaptured and recycled

¹Denotes Ultraleather® | Pro and Promessa®

²Denotes Ultraleather® | Promessa®

Source International

17 Gilmore Drive
Sutton, MA 01590
T 800.722.0474

www.sourceinternationaldesign.com

SOURCE